

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : E03D 5/00		A1	(11) International Publication Number: WO 97/03254 (43) International Publication Date: 30 January 1997 (30.01.97)
(21) International Application Number: PCT/GB96/01637 (22) International Filing Date: 8 July 1996 (08.07.96) (30) Priority Data: 9514281.6 13 July 1995 (13.07.95) GB (71) Applicant (for all designated States except US): ANGLIAN WATER SERVICES LTD. [GB/GB]; Anglian House, Ambury Road, Huntingdon, Cambridgeshire PE18 6NZ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): MURRER, Edwin, William, John [GB/GB]; 24 West Drive, Highfields, Caldecote, Cambridge CB3 7NY (GB). (74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).		(81) Designated States: AL, AM, AU, AZ, BB, BG, BR, BY, CA, CN, CZ, EE, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, RO, RU, SD, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: DOMESTIC WATER TREATMENT SYSTEM

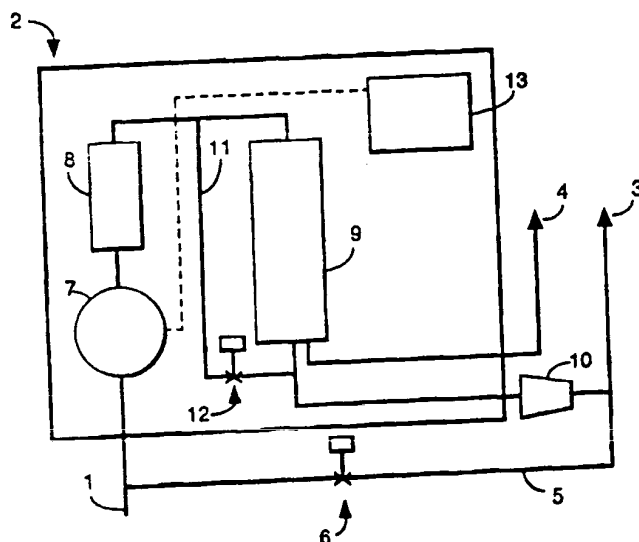

(57) Abstract

A domestic water system comprises: units, including toilets, fed under gravity from a storage tank; a water softener (2) including a membrane (9), and first and second outlets (3, 4) for softened water and reject water, respectively and first and second storage tanks (14, 15) for softened water and reject water, respectively, the second tank (15) being in connection with the toilet (24), and the first tank (14) being in connection with other units (20). The invention makes particular use of the fact that the proportion of reject water from a membrane softener, and the proportion of domestic water usage for flushing toilets, are very similar. Water wastage is thus minimised.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

DOMESTIC WATER TREATMENT SYSTEMField of the Invention

This invention relates to a domestic water treatment system. It relates in particular to a system adapted to
5 maximise the use of softened water, and to minimise water wastage.

Background of the Invention

The most common form of domestic water softener is an ion-exchange system, in which the hardness is removed by
10 deposition onto special resin beads. At frequent intervals, the resin beads need to be cleaned; a salt solution is used to regenerate the resin by removing the hardness which then forms part of a salt/hardness waste stream. The waste stream is discharged to the sewer. This
15 type of softening device will produce water of variable hardness, depending upon the condition of the resin beads. Typically, this type of water softener treats all the water on its way to the storage tank in the loft, and of this total volume about 35% will be used for flushing toilets.

20 Membranes are very effective at softening water. They do not need any form of regeneration but do produce a reject stream which can be as high as 50% of the volume treated. Direct disposal of the reject system would be a waste of water and cause very high water consumption.

25 EP-A-0393308 describes apparatus for washing vehicles, using a membrane separator through which water is pumped and divided into two streams, a clean water stream and a reject water stream. The streams pass to respective storage tanks, from which water is taken as desired, the
30 reject water for washing vehicles and the clean water for rinsing them. The level of reject water is controlled and, if it falls, the clean water is used to supplement the reject water. Part of the reject stream is recirculated to the inlet of the membrane separator, via the pump.

35 WPI Abstract Accession No. 75-65172W/39 (SU-A-0454180) discloses splitting the output from a cation-exchange membrane separator. One output is used to feed boilers,

and the other to maintain water levels. The outputs may also be mixed.

Summary of the Invention

It has now been appreciated that membranes, particularly those that have been recently developed for use under low pressures, can increase the output from a small membrane softening unit. At the same time, the re-use of the reject stream for toilet flushing ensures that no water is lost, and that toilets are not flushed with expensive softened water.

According to the present invention, in a domestic water system having units, including toilets, fed under gravity from a storage tank, the system comprises:

a water softener including a membrane, and first and second outlets for softened water and reject water, respectively;

first and second storage tanks for softened water and reject water, respectively, the second tank being in connection with toilets, and the first tank being in connection with other units.

Brief Description of the Drawings

The invention will be described by way of example only with reference to the accompanying drawings, in which:

Figs. 1A and 1B are each highly schematic views of units that, in combination, constitute a preferred embodiment of a domestic water system according to this invention.

Description of the Invention

In general terms, the system to which this invention relates incorporates a domestic membrane water softener as part of an installation which enables the re-use of the reject stream for toilet flushing. For example, an embodiment of this invention utilises a unit that comprises a small pump, a carbon filter and the membrane which is installed in a small pressure tube. The membrane unit may be controlled by a small panel which is programmable to operate mainly at night using cheap rate electricity, with

top-ups during the day as required. An automatic by-pass conduit may be provided, with a valve programmed to valve open when the unit is out of action. This ensures that at least the reject water storage tank is supplied with sufficient, mains water.

5 The softened water stream from the membrane is piped to a storage tank in the loft. As in a conventional domestic system, this water is used to supply domestic units, e.g. handbasins and/or baths, under gravity. A conventional valve may be provided, to control the maximum level of water in this tank.

10 The reject stream from the membrane is piped to a second storage tank in the loft. This is used as the supply to the toilet cisterns. The reject water storage tank is connected to the mains feed via a low level ball valve, to ensure a supply at times when the membrane unit switched off. In case the level rises, an overflow is provided.

20 It is a particular advantage of the present invention that the reject stream typically constitutes about 40%, e.g. within the range of 30-50%, of the input, and that this is comparable to the amount of water conventionally used for flushing toilets. The amount of water lost via the overflow is therefore low. Thus, a system of the invention is well adapted to maximum usage of water, on the one hand of "clean water" that users of units such as baths and/or handbasins can happily allow to come into contact with the body, and on the other hand of "grey" water which cannot be used for the same purpose but which can usefully be used in a domestic environment. This is distinct from any possible reuse of grey water from, say, handbasins.

25 In the drawings, Fig. 1A shows an inlet 1 from a mains water supply (not shown), a membrane softening unit indicated generally at 2, and outlets 3,4 for softened water and reject water, respectively. In addition, a conduit 5 including an automatic by-pass valve 6 provides

an alternative route for water from the inlet 1 to the outlet 3.

The unit 2 comprises, in line, a pump 7, a carbon filter 8, a membrane in a pressure tube 9, and a non-return valve 10 on the softened water outlet. In addition, an internal by-pass conduit 11 includes a blend control valve 12. This valve and the pump, and also the valve 6, are controlled, and the control is supplied with power, by means (not shown); a control panel 13 is provided.

As indicated above, the unit is programmable to run when required, e.g. using cheap-rate electricity. When not in use, the valve 6 is opened, so that mains water passes directly to the outlet 3.

Fig. 1B shows storage tanks 14 and 15, provided in a domestic loft, respectively for softened water and reject water, supplied by inlets 16 and 17 corresponding to the softening unit's outlets 3 and 4. The storage tank 14 has a conventional ball valve 18, and an outlet 19 leading to, say, baths and handbasins; a handbasin 20 is shown.

The reject water storage tank 15 is supplied additionally by a mains water inlet 21. A conventional low level ball valve 22 ensures that the water level does not fall below a minimum. An outlet 23 leads to toilets, one of which is shown at 24. There is also an overflow 25, leading directly to the sewer.

CLAIMS

1. A domestic water system comprising:
units, including toilets, fed under gravity from a
storage tank;
5 a water softener including a membrane, and first and
second outlets for softened water and reject water,
respectively; and
first and second storage tanks for softened water and
reject water, respectively, the second tank being in
10 connection with the toilet, and the first tank being in
connection with other units.
2. A system according to claim 1, which additionally
comprises means for controlling operation of the softener,
and a by-pass conduit for water to at least the first
15 outlet, the conduit being open when the water softener is
turned off.
3. A system according to claim 1, which additionally
comprises a valve controlling the maximum level of water in
the first tank, an inlet for mains water into the second
20 tank, a valve controlling the minimum water level in the
second tank, and an overflow from the second tank.
4. A system according to claim 1, wherein said other
units comprise handbasins and/or baths.

Fig.1A.


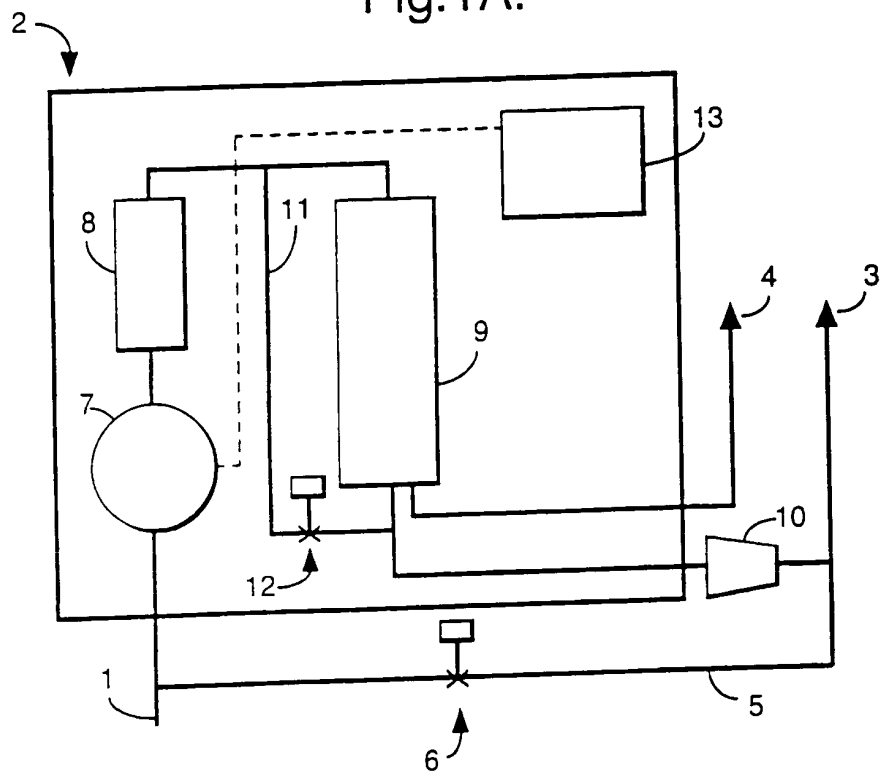


Fig.1B.

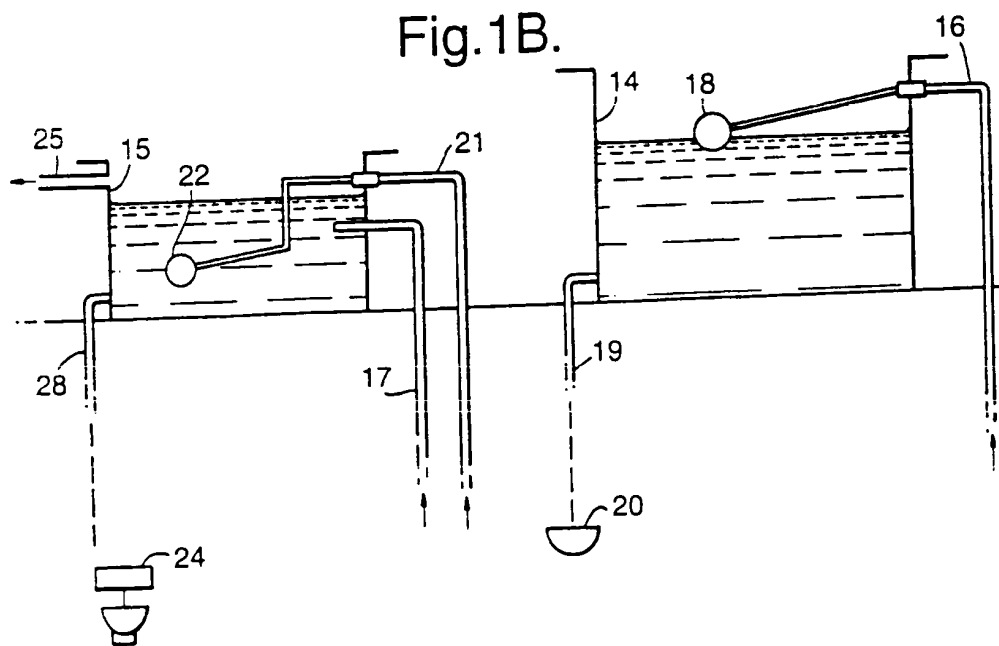

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/GB 96/01637

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 E03D5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 E03D E03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP,A,0 616 976 (GRUENBECK JOSEF WASSERAUF) 28 September 1994 see column 1, line 24 - column 2, line 31; figure	1,4
Y	DE,A,37 38 231 (BLANCO GMBH & CO KG) 24 May 1989 see column 3, line 33 - line 47 see column 4, line 8 - line 14 see figure 1	1,4
A	DE,A,40 07 351 (BROEKE ERNST H) 10 January 1991 see column 4, line 22 - column 6, line 3 see figures	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

18 October 1996

Date of mailing of the international search report

08. 11 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Guthmuller, J

INTERNATIONAL SEARCH REPORT

Int. Application No.
PCT/GB 96/01637

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 393 308 (SOGICO SA) 24 October 1990 cited in the application see the whole document ---	1
A	DE,A,43 35 669 (BWT WASSERTECHNIK GMBH) 27 April 1995 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No.

PCT/GB 96/01637

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0616976	28-09-94	DE-U- 9304377 HU-U- 520	27-05-93 28-06-95
DE-A-3738231	24-05-89	NONE	
DE-A-4007351	10-01-91	DE-A- 3904452 DE-A- 3927346	18-10-90 28-02-91
EP-A-0393308	24-10-90	CH-A- 679764 CA-A- 2012601 DE-D- 69008016 DE-T- 69008016 ES-T- 2020904	15-04-92 19-10-90 19-05-94 28-07-94 16-07-94
DE-A-4335669	27-04-95	NONE	